

Vaše lično svetlo



Light Electric
group

www.legroup.rs



Light Electric
group



Firma **Light Electric Kraljevo** je osnovana 2003. godine, a kao **Light Electric group** posluje od decembra 2008. godine. Od samog osnivanja firma pretenduje da postane lider u rešenju kvalitetnog osvetljenja. U želji da doprinesemo kvalitetom, dizajnom i ekologijom našli smo partnere u evropskim kompanijama „OMS“ Slovačka i „ES-SYSTEM“ Poljska koje u proizvodnji svetiljki koriste najmoderniju tehnologiju za komponente, renomiranih brendova, sa dugim radnim vekom, smanjenom potrošnjom energije i efikasnim optičkim priborom.

Light Electric group Kraljevo je firma koja projektima, logistikom u saradnji sa investitorima, projektantima i elektroizvođačima donosi
Vaše lično svetlo!





Perlita

2



Plast B

9



Perlita Adjustable

3



Air Eco

10



Prettus II Eco

4



Zipar Track

11



Ezar EC2

5



Oria

12



Frey II

6



Tornado II Eco LED

13



Sana

7



Cosmo LED

16



Plast EC 1

8



Cosmo Apex

17



Roby

18



Industria

19



Ledpipe 1

25



Semai

26



Myar

20



Keaton

27



Grafias

21



Emergency 2921

28



Capricorn LED

22



Monitor 1 IP65

29



Perida

23



Emergency 2900

30



Delta LED

24



Emergency 2910

31

Perlita



IP 20

IP 54

220-240V
50-60HzCCT
4000
K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
PERLITA L	2.350	25	94	80+	4.000	64°	1,4

Tolerancija svetlosnog fluksa +/- 10%

Perlita

Montaža

Ugradna

Izvor svetlosti

LED

Optički sistem

Reljefni reflektor

Napajanje

Integrisano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućište: aluminijum
Postolje: liveni aluminijum
Reflektor: eloksirani aluminijum
Poklopac: providni polikarbonat

Površinska obrada

Postolje: belo, RAL 9003 (W03)

Trajnost



40.000 sati/L70

Temperatura područja rada


Od -20 °C do +35 °C

Proizvođač

„OMS“ Slovačka, EU

LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR < 22PERLITA L
2350 lm 4000 K

Montaža



Perlita Adjustable



IP
20

220-240V
50-60Hz

CCT
4000
K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
PERLITA ADJUSTABLE M 60°	2.700	25	108	80+	4.000	60°	1,2

Tolerancija svetlosnog fluksa +/- 10%

Perlita Adjustable

Montaža

Ugradna

Izvor svetlosti

LED

Optički sistem

Reljefni reflektor

Napajanje

Integrisano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućiče: aluminijum
Postolje: liveni aluminijum
Reflektor: eloksirani aluminijum
Poklopac: providni polikarbonat

Površinska obrada

Postolje: belo, RAL 9003 (W03)

Trajnost



50.000 sati/L80

Temperatura područja rada


Od -20 °C do +35 °C

Proizvođač

„OMS“ Slovačka, EU

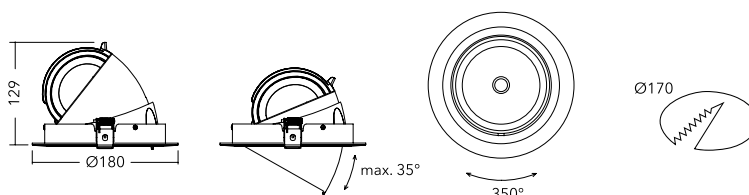

Montaža



Prettus II Eco



IP 20

IP 40

220-240V
50-60HzCCT
4000
K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
PRETTUS II ECO	2.700	28	96	80+	4.000	65°	0,9

Tolerancija svetlosnog fluksa +/- 10%

Prettus II Eco

Montaža

Ugradna

Izvor svetlosti

LED

Optički sistem

Polirani reflektor

Napajanje

Integrisano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućiste: čelični lim
Difuzor: mikroprizmatični PMMA
Postolje: liveni aluminijum
Reflektor: eloksirani aluminijum

Površinska obrada

Postolje: belo, RAL 9003 (W03)

Trajnost



50.000 sati/L70

Temperatura područja rada


Od -20 °C do +35 °C

Proizvođač

„OMS“ Slovačka, EU

LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR <25PRETTUS II ECO
2700 lm 4000 K

Montaža



Ezar EC2



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
EZAR EC2	3.600	36	100	80+	4.000	112°	2,7

Tolerancija svetlosnog fluksa +/- 10%

Ezar EC2

Montaža

Ugradna/nagradna

Izvor svetlosti

LED

Optički sistem

Opal difuzor

Napajanje

Integrirano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućište: aluminijum
Difuzor: polikarbonat

Površinska obrada

Postolje: belo, RAL 9003 (W03)

Dodatna oprema

Okvir za montažu na plafon (nadgradna)
Okvir za montažu u plafon (ugradna/gips)

Trajnost


50.000 sati/L70

Temperatura područja rada


Od -20 °C do +35 °C

Proizvođač

„OMS“ Slovačka, EU

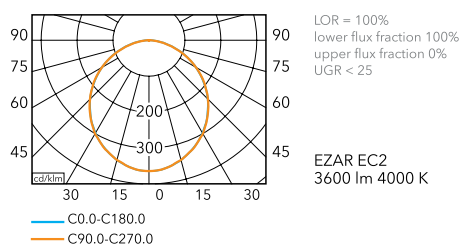

ECG



Montaža

PV CEILING (600 x 600)



Freyn II



IP 20

IP 40

220-240V
50-60HzCCT
4000
K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
FREYN II S/R	3.100	22	141	80+	4.000	85°	3,1/8,0
FREYN II S/R	4.250	31	137	80+	4.000	85°	3,1/8,0

Tolerancija svetlosnog fluksa +/- 10%

Freyn II

Montaža

Ugradna/nadgradna

Izvor svetlosti

LED

Optički sistem

Mikroprizmatični difuzor

Napajanje

Integrirano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućište: čelični lim

Difuzor: PMMA

Površinska obrada

Postolje: belo, RAL 9003 (W03)

Trajnost


50.000 sati/L80

Temperatura područja rada


Od -20 °C do +35 °C

Proizvođač


„OMS“ Slovačka, EU

LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR > 19FREYN II SS1
4250 lm 4000 K

Nadgradna




Ugradna



Montaža

Nadgradna



Ugradna



Sana



IP
20

IP
40

220-240V
50-60Hz

CCT
4000
K



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
SANA	3.750	35	107	80+	4.000	85°	4,0

Tolerancija svetlosnog fluksa +/- 10%

Sana

Montaža

Ugradna/nadgradna

Izvor svetlosti

LED

Optički sistem

Mikroprizmatični difuzor

Napajanje

Integrirano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućište: aluminijum

Difuzor: polikarbonat

Površinska obrada

Postolje: belo, RAL 9016 (W16)

Dodatna oprema

Okvir za montažu na plafon (nadgradna)

Okvir za montažu u plafon (ugradna/gips)

Trajnost


50.000 sati/L70

Temperatura područja rada

Od -20 °C do +35 °C




Proizvođač

„OMS“ Slovačka, EU



LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR < 19

SANA PV1
3750 lm 4000 K



Montaža

PV CEILING (600 x 600)

PR CEILING (625 x 625)



Plast EC1



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
PLAST EC1	1.100	12	92	80+	4.000	110°	2,0

Tolerancija svetlosnog fluksa +/- 10%

Plast EC1

Montaža

Nadgradna

Izvor svetlosti

LED

Optički sistem

Opal difuzor

Napajanje

Integrirano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućište: beli polikarbonat
Difuzor: polikarbonat

Trajnost


30.000 sati/L70

Temperatura područja rada

Od -20 °C do +35 °C


Proizvođač

„OMS“ Slovačka, EU




LOR = 100%
lower flux fraction 97%
upper flux fraction 3%
UGR < 25

PLAST EC1
1100 lm 4000 K



Montaža



Plast B



IP
54

IK
08

220-240V
50-60Hz

CCT
4000
K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
PLAST B	2.300	25	92	80+	4.000	112°	1,0

Tolerancija svetlosnog fluksa +/- 10%

Plast B

Montaža

Nadgradna

Izvor svetlosti

LED

Optički sistem

Opal difuzor

Napajanje

Integrirano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućište: beli polikarbonat
Difuzor: polikarbonat

Trajnost


40.000 sati/L70

Temperatura područja rada

Od -20 °C do +35 °C


Proizvođač

„OMS“ Slovačka, EU




LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR < 28

PLAST B
2300 lm 4000 K



Montaža



Air Eco



IP
20

220-240V
50-60Hz

CCT
4000
K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
AIR ECO	2.300	21	110	80+	4.000	24°/40°	1,1

Tolerancija svetlosnog fluksa +/- 10%

Air Eco

Montaža

Strujni šinski sistem, mogućnost montaže na plafon / visilice

Izvor svetlosti

LED

Optički sistem

Reljefni reflektor

Napajanje

Integrisano elektronsko uključivanje/isključivanje (FIX/ECG)

Materijal

Kućište: liveni aluminijum + čelik
Reflektor: eloksirani aluminijum

Površinska obrada

Kućište: belo, RAL 9003 (W03)
crno, RAL 9005 (B05)

Dodatna oprema

Šine, različite spojnice, sajle

Trajnost


50.000 sati/L80

Temperatura područja rada

Od -20 °C do +35 °C




Proizvođač

„OMS“ Slovačka, EU




LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR < 19


AIR ECO
2300 lm 4000 K



Montaža

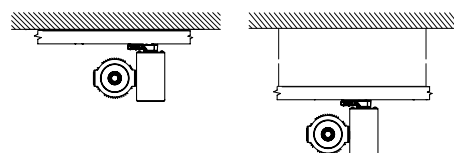

Zipar Track



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
ZIPAR TRACK	2.750	23	120	80+	4.000	24°/40°	0,8
ZIPAR TRACK	3.650	33	111	80+	4.000	24°/40°	0,8

Tolerancija svetlosnog fluksa +/- 10%

Zipar Track

Montaža

Strujni šinski sistem, mogućnost montaže na plafon / visilice

Izvor svetlosti

LED

Optički sistem

Reljefni reflektor

Napajanje

Integrisano elektronsko uključivanje/isključivanje (FIX/ECG)

Materijal

Kućište: liveni aluminijum + čelik
Reflektor: eloksirani aluminijum

Površinska obrada

Kućište: belo, RAL 9003 (W03)
crno, RAL 9005 (B05)

Dodatna oprema

Šine, različite spojnice, sajle

Trajnost




50.000 sati/L80

Temperatura područja rada


Od -20 °C do +35 °C

Proizvođač

„OMS“ Slovačka, EU

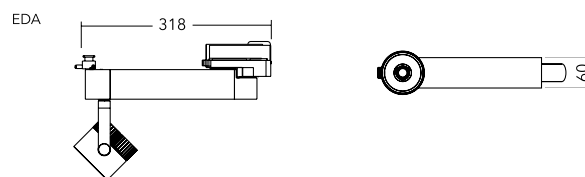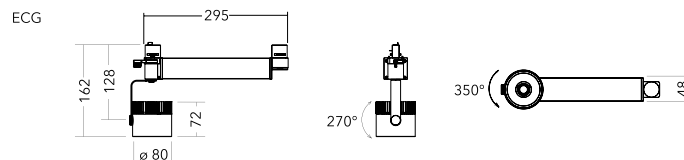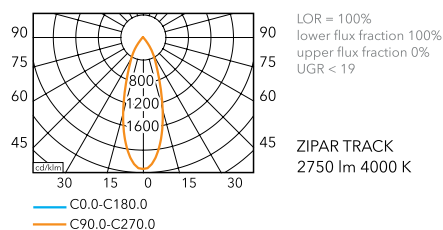

Montaža



Oria



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
ORIA	6.700	51	131	80+	4.000	115°	2,2

Tolerancija svetlosnog fluksa +/- 10%

Oria

Montaža
Nadgradna/viseća

Izvor svetlosti
LED

Optički sistem
Prizmatični difuzor

Napajanje
Integrirano elektronsko
uključivanje/isključivanje (FIX/ECG)
Spoljni dovodni fleksibilni kabl



Materijal
Kućiste: brizgani polikarbonat
Difuzor: polikarbonat

Dodatna oprema
Sajle visilice


Trajnost
50.000 sati/L70

Temperatura područja rada
Od -20 °C do +35 °C

Proizvođač
„OMS“ Slovačka, EU

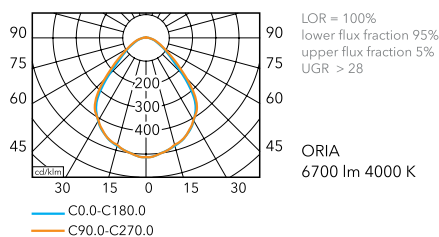

Montaža



Tornado II Eco LED



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
TORNADO II ECO LED S	3.050	24	127	80+	4.000	153°	1,3
TORNADO II ECO LED M	4.200	34	124	80+	4.000	153°	2,3
TORNADO II ECO LED L	9.300	68	137	80+	4.000	153°	2,8

Tolerancija svetlosnog fluksa +/- 10%

Tornado II Eco LED

Montaža

Nadgradna/viseća

Izvor svetlosti

LED

Optički sistem

Opal difuzor

Napajanje

Integrirano elektronsko uključivanje/isključivanje (FIX/ECG)

Materijal

Kućiste: brizgani polikarbonat
Difuzor: polikarbonat

Dodatna oprema

Sajle visilice

Trajnost


50.000 sati/L80

Temperatura područja rada

Od -20 °C do +35 °C



Proizvođač

„OMS“ Slovačka, EU





LOR = 100%
lower flux fraction 88%
upper flux fraction 12%
UGR < 28

TDO II ECO LED
9000 lm 4000 K

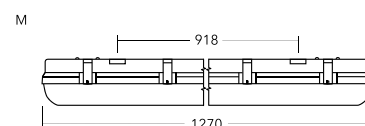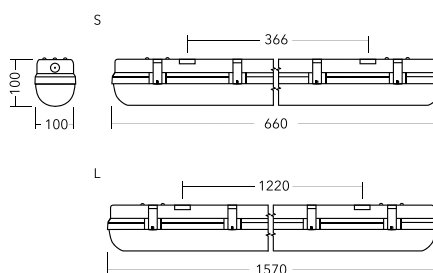

Montaža



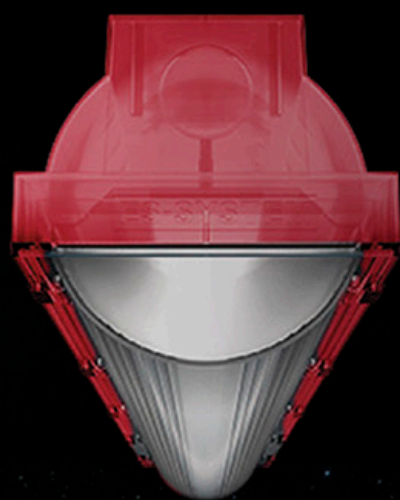

COSMO
SYSTEM



COSMO

Vaše lično svetlo

Cosmo LED



IP 65

IK 08

220-240V
50-60HzCCT
4000
K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
COSMO LED	9.800	79	131	80+	4.000	70°	2,7

Tolerancija svetlosnog fluksa +/- 10%

Cosmo LED

Montaža

Nadgradna/viseća

Izvor svetlosti

LED

Optički sistem

Transparentni/Opal difuzor

Napajanje

Integrirano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućiče: polikarbonat

Difuzor: polikarbonat

Dodatna oprema

Sajle visilice

Trajnost



63.000 sati/L80

Temperatura područja rada

Od -20 °C do +35 °C

Proizvođač

„ES-System“ Poljska, EU

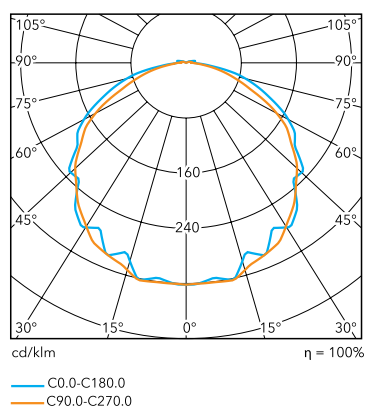

Cosmo Apex



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
COSMO APEX	7.300	50	146	80+	4.000	40° x 60°	2,7

Tolerancija svetlosnog fluksa +/- 10%

Cosmo Apex

Montaža

Nadgradna/viseća

Izvor svetlosti

LED

Optički sistem

Transparentni/Opal difuzor

Napajanje

Integrirano elektronsko uključivanje/isključivanje (FIX/ECG)

Materijal

Kućište: polikarbonat

Difuzor: polikarbonat

Dodatna oprema

Sajle visilice

Trajnost



66.000 sati/L80

Temperatura područja rada

Od -20 °C do +35 °C

Proizvođač

„ES-System“ Poljska, EU

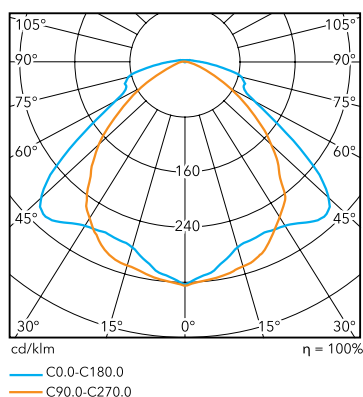

Roby



IP	65
IK	09
220-240V	50-60Hz
CCT	4000 K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
ROBY	26.000	200	130	80+	4.000	70°	7,0

Tolerancija svetlosnog fluksa +/- 10%

Roby

Montaža
Viseća

Izvor svetlosti
LED

Napajanje
Integrisano elektronsko
uključivanje/isključivanje (FIX/ECG)


Materijal
Kućiče: liveni aluminijum + čelik
Difuzor: kaljeno providno staklo

Dodatna oprema
Aluminijumski reflektujući odsijač


Trajnost
66.000 sati/L70

Temperatura područja rada
Od -20 °C do +35 °C


Proizvođač
„ES-System“ Poljska, EU

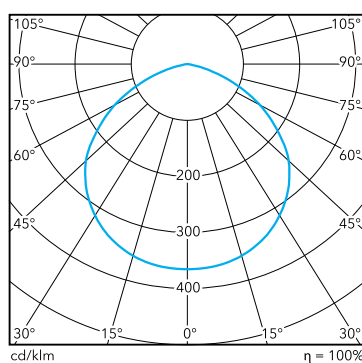

— C0.0-C180.0
— C90.0-C270.0

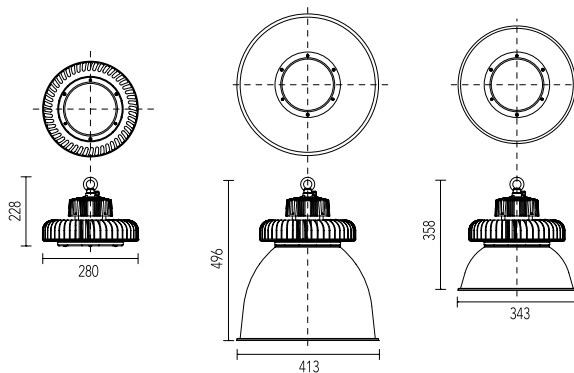

Industria

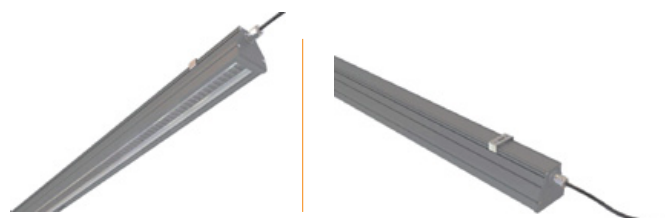

IP	65
IK	07
IK	09
220-240V	50-60Hz
CCT	4000 K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
INDUSTRIA 1	3.900	33	118	80+	4.000	60°	2,0
INDUSTRIA 1	8.000	64	125	80+	4.000	60°	3,5
INDUSTRIA 1	11.800	95	124	80+	4.000	60°	5,0

Tolerancija svetlosnog fluksa +/- 10%

Industria

Montaža

Nadgradna/viseća

Izvor svetlosti

LED

Napajanje

Integrisano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućiče: eloksirani aluminijumski profil
Difuzor: kaljeno providno staklo

Dodatna oprema

Sajle visilice

Trajnost



66.000 sati/L80

Temperatura područja rada

Od -20 °C do +35 °C

Proizvođač

„ES-System“ Poljska, EU


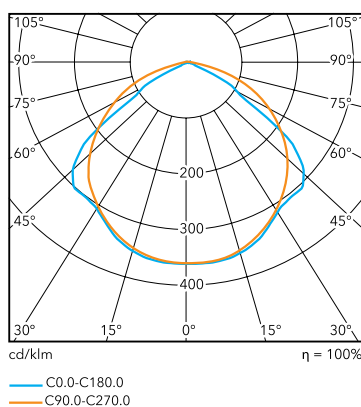


Myar



IP 65

IK 07

220-240V
50-60HzCCT
4000
K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
MYAR	12.000	93	129	80+	4.000	70°	13,1/10
MYAR	14.150	108	131	80+	4.000	70°	13,1/10
MYAR	20.200	161	125	80+	4.000	70°	13,5/10,3

Tolerancija svetlosnog fluksa +/- 10%

Myar

Montaža

Ugradna/nadgradna/viseća

Izvor svetlosti

LED

Optički sistem

Prizmatični difuzor

Napajanje

Integrisano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućiste: liveni aluminijum + čelik
Difuzor: kaljeno providno staklo

Površinska obrada

Kućiste: belo, RAL 9003 (W03)
crno, RAL 9005 (B05)

Dodatna oprema

Zaštitni sloj prilagođen za prehrambenu industriju
Reflektor sa većim uglom rasipanja (84/90)
Sajle visilice

Trajnost


50.000 sati/L80

Temperatura područja rada


Od -40 °C do +40 °C

Proizvođač


„OMS“ Slovačka, EU

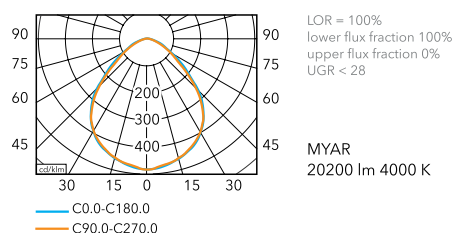


NADGRADNA



UGRADNA




VIŠEĆA




Montaža

NADGRADNA




UGRADNA



VIŠEĆA



Grafias



IP	66
IK	07
220-240V	50-60Hz
CCT	5000 K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
GRAFIAS	11.900	94	127	80+	5.000	70°	10,0
GRAFIAS	17.200	142	121	80+	5.000	70°	10,0

Tolerancija svetlosnog fluksa +/- 10%

Grafias

Montaža

Ugradna/nadgradna/viseća

Izvor svetlosti

LED

Optički sistem

Polirani reflektor

Napajanje

Integrirano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućište: liveni aluminijum
Difuzor: kaljeno providno staklo

Površinska obrada

Kućište: belo, RAL 9003 (W03)
crno, RAL 9005 (B05)

Dodatna oprema

Reflektor sa 50° većim uglom rasipanja
Sajle visilice

Trajnost


50.000 sati/L80 (94W)
50.000 sati/L70 (142W)

Temperatura područja rada

Od -40 °C do +40 °C

Proizvođač


„OMS“ Slovačka, EU




LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR<28

GRAFIAS
11900 lm 4000 K


NADGRADNA



UGRADNA




VISEĆA




Montaža

NADGRADNA



UGRADNA



VISEĆA



Capricorn LED



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
CAPRICORN LED XS	6.600	50	132	70+	5.000	120°	2,2
CAPRICORN LED S	10.500	80	131	70+	5.000	120°	2,7
CAPRICORN LED M	13.500	100	132	70+	5.000	120°	5,3

Tolerancija svetlosnog fluksa +/- 10%

Capricorn LED

Montaža
Nadgradna

Izvor svetlosti
LED

Optički sistem
Matirani reflektor

Napajanje
Integrirano elektronsko
uključivanje/isključivanje (FIX/ECG)


Materijal
Kućiste: liveni aluminijum + čelik
Reflektor: eloksirani aluminijum
Poklopac reflektora: kaljeno providno staklo

Površinska obrada
Kućiste: crno RAL 9005 (B05)

Trajnost
50.000 sati/L70

Temperatura područja rada
Od -30 °C do +35 °C


Proizvođač
„OMS“ Slovačka, EU




LOR = 100%
lower flux fraction 100%
upper flux fraction 0%

CAPRICORN LED S
10500 lm 5000 K


XS



S



M





IP	65
IK	08
220-240V	50-60Hz
CCT	4000 K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
PARIDA	13.500	100	135	80+	4.000	90°	6,5
PARIDA	20.200	150	135	80+	4.000	90°	6,5
PARIDA	26.500	200	133	80+	4.000	90°	7,2

Tolerancija svetlosnog fluksa +/- 10%

Parida

Montaža
Viseća

Izvor svetlosti
LED


Napajanje
Integrisano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal
Kućište: liveni aluminijum
Difuzor: polikarbonat

Trajnost
50.000 sati/L70


Temperatura područja rada
Od -30 °C do +40 °C

Proizvođač
„OMS“ Slovačka, EU




LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR >28

PARIDA
20200 lm 4000 K



Montaža



Delta LED



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
DELTA LED 360	6.600	83	79	80+	4.000	40°	6,0
DELTA LED 360	10.700	100	107	80+	4.000	40°	6,0

Tolerancija svetlosnog fluksa +/- 10%

Delta LED

Montaža

Nadgradna

Izvor svetlosti

LED

Napajanje

Integrisano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućiste: liveni aluminijum
Difuzor: kaljeno providno staklo

Trajnost



62.000 sati/L80

Temperatura područja rada

Od -20 °C do +35 °C

Proizvođač

„ES-System“ Poljska, EU

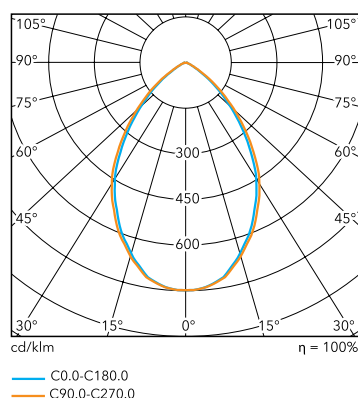

Ledpipe 1



IP
65

IK
07

220-240V
50-60Hz

CCT
4000
K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	UGAO RASIPANJA	MASA (kg)
LEDPIPE 1 200	200	4	50	80+	4.000	24°	1,0
LEDPIPE 1 280	400	8	50	80+	4.000	24°	1,1
LEDPIPE 1 520	800	16	50	80+	4.000	24°	1,4

Tolerancija svetlosnog fluksa +/- 10%

Ledpipe 1

Montaža

Nadgradna/zidna

Izvor svetlosti

LED

Optički sistem

Transparentni polikarbonat

Napajanje

Integrisano elektronsko
uključivanje/isključivanje (FIX/ECG)

Materijal

Kućiste: providna PMMA zaštitna cev + čelik

Trajnost


50.000 sati/L70

Temperatura područja rada


Od -20 °C do +35 °C

Proizvođač


„ES-System“ Poljska, EU

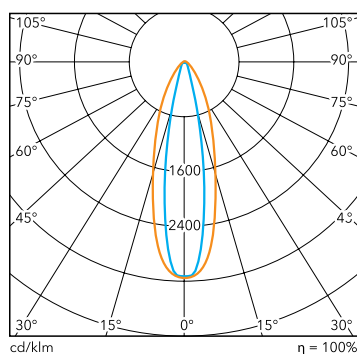


— C0.0-C180.0
— C90.0-C270.0



LEDPIPE 1 200



LEDPIPE 1 280



LEDPIPE 1 520

Semai



IP	66
IK	08
220-240V	50-60Hz
CCT	4000 K

TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	PREPORUČLJIVA VISINA MONTAŽE (m)	MASA (kg)
SEMAI	4.100	36	114	70+	4.000	5-8	7,4
SEMAI	7.150	63	113	70+	4.000	7-10	7,9
SEMAI	11.100	105	106	70+	4.000	8-12	7,9

Tolerancija svetlosnog fluksa +/- 10%

Semai

Montaža

Na čeličnu cev Ø60

Izvor svetlosti

LED

Optički sistem

Objektiv L01

Po zahtevu: L04, L05, L06, L08, L09, L10, L12

Napajanje

Integrisano elektronsko
uključivanje/isključivanje (FIX/ECG)
Spoljni dovodni fleksibilni kabl

Materijal

Kućiste: liveni aluminijum
Poklopac: kaljeno providno staklo
Okvir: čelik
Zglob: liveni aluminijum

Površinska obrada:

Kućiste: siva, RAL 9006 (G06)

Trajnost

100.000 sati/L90 (27/36/45/54 W)


100.000 sati/L70 (63/80/105 W)

Temperatura područja rada

Od -40 °C do +40 °C



Proizvođač

„OMS“ Slovačka, EU





LOR = 100%
lower flux fraction 100%
upper flux fraction 0%

SEMAI
4000 K



Montaža



Ø 60

Keaton M



IP 66

IK 09

220-240V
50-60Hz

CCT
4000 K



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	SVETLOSNA EFIKASNOST (lm/W)	INDEKS REPRODUKCIJE BOJA CRI (Ra)	TEMPERATURA BOJE CCT (K)	PREPORUČLJIVA VISINA MONTAŽE (m)	MASA (kg)
KEATON M	9.300	77	121	70+	4.000	7-10	9,0
KEATON M	10.400	88	118	70+	4.000	8-12	9,2
KEATON M	14.000	125	112	70+	4.000	8-12	9,2

Tolerancija svetlosnog fluksa +/- 10%

Keaton M

Montaža

Na čeličnu cev Ø60

Izvor svetlosti

LED

Napajanje

Integrisano elektronsko
uključivanje/isključivanje (FIX/ECG)
Spoljni dovodni fleksibilni kabl

Materijal

Kućište: liveni aluminijum
Poklopac: kaljeno providno staklo
Zglob: liveni aluminijum

Površinska obrada:

Kućište: siva, RAL 9006 (G06)

Trajnost


50.000 sati/L70

Temperatura područja rada

Od -30 °C do +40 °C

Proizvođač



„OMS“ Slovačka, EU





LOR = 100%
lower flux fraction 100%
upper flux fraction 0%

KEATON M
4000 K

— C0.0-C180.0
— C90.0-C270.0




Montaža

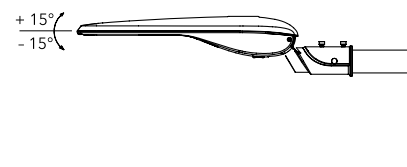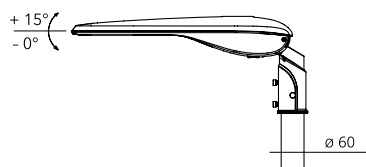

Emergency 2921



EXIT



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	BATERIJA Ni-Cd (V/Ah)	TRAJANJE (h)	MASA (kg)
EMERGENCY 2921	150	1,3	3,6/1,5	3	0,8

Tolerancija svetlosnog fluksa +/- 10%

Emergency 2921

Montaža

Nadgradna/ugradna

Izvor svetlosti

LED

Napajanje

Ni-Cd baterija

(zaštita od preopterećenja i pražnjenja)

LED indikator punjenja

Materijal

Kućište: polikarbonat

Difuzor: polikarbonat

Osnovna oprema



Tri tipa oznaka upozorenja (nalepnice)

Dodatna oprema


Aluminijumski ram za montažu u plafon
(ugradna/gips)

Proizvođač


„OMS“ Slovačka, EU



Montaža



Monitor 1 IP65



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	BATERIJA Ni-Cd (V/Ah)	TRAJANJE (h)	MASA (kg)
MONITOR 1 IP65	305	3,8	3,6/1,5	1	2,2

Tolerancija svetlosnog fluksa +/- 10%

Monitor 1 IP65

Montaža

Zidna

Izvor svetlosti

LED

Napajanje

Ni-Cd baterija

(zaštita od preopterećenja i pražnjenja)

LED indikator punjenja

Materijal

Kućište: plastika


Difuzor: prozorna plastika

Dodatna oprema

Tri tipa oznaka upozorenja (nalepnice)

Proizvođač

„ES-System“ Poljska, EU

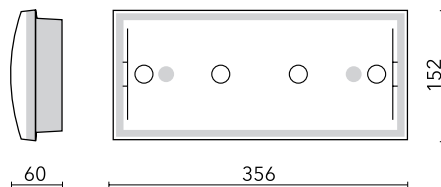

Emergency 2900



EXIT



IP
20

220-240V
50-60Hz



TIP	SVETLOSNI FLUKS	UKUPNA SNAGA	BATERIJA Ni-Cd	TRAJANJE	MASA
	(lm)	(W)	(V/Ah)	(h)	(kg)
EMERGENCY 2901	20	1,2	3,6/1,5	1	2,0

Tolerancija svetlosnog fluksa +/- 10%

Emergency 2900

Montaža

Ugradna

Izvor svetlosti

LED

Napajanje

Ni-Cd baterija 3,6/1

(zaštita od preopterećenja i pražnjenja)

LED indikator punjenja

Materijal

Kućište: čelik


Difuzor: pleksiglas

Osnovna oprema



Dva tipa oznaka upozorenja (umetak)

Proizvođač

„OMS“ Slovačka, EU

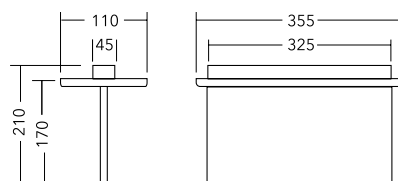

Montaža



Emergency 2910



EXIT



IP
20

220-240V
50-60Hz



TIP	SVETLOSNI FLUKS (lm)	UKUPNA SNAGA (W)	BATERIJA Ni-Cd (V/Ah)	TRAJANJE (h)	MASA (kg)
EMERGENCY 2911	30	1,2	3,6/1,5	1	1,2

Tolerancija svetlosnog fluksa +/- 10%

Emergency 2910

Montaža

Nadgradna

Izvor svetlosti

LED

Napajanje

Ni-Cd baterija 3,6/1

(zaštita od preopterećenja i pražnjenja)

LED indikator punjenja

Materijal

Kućište: čelik


Difuzor: pleksiglas

Osnovna oprema


Dva tipa oznaka upozorenja (umetak)

Proizvođač

„OMS“ Slovačka, EU

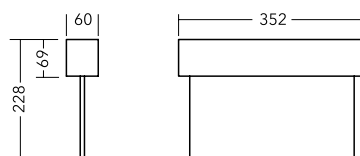

Montaža







SISTEM SUVE GRADNJE - PLAFONI - RASVETA

Spušteni plafoni
Oblaganje unutrašnjih zidova
Pregradni zidovi
Dekoratívna rasveta
Elektro-instalaterski radovi
Molersko-farbarski radovi
Podopolagački radovi

Višegodišnje iskustvo
Profesionalna montaža
Atestirani proizvodi
i ekološki materijali
Savremen dizajn
Laserske nivelacije prostora
Stručni saveti

STABILO

Boška Toškovića 26, 36000 Kraljevo, Srbija
+381 36 392 059 • +381 69 55 23 338
office@stabilo.co.rs • www.stabilo.co.rs




Ovlašćeni
distributer
za Srbiju i
EX Jugoslaviju



Autonics
www.autonics.com

Senzori



Procesna
automatizacija

Frekventni regulatori



Kontroleri



Boška Toškovića 26, 36000 Kraljevo, Srbija
+381 36 392 059 • +381 63 601 696
office@sepon.rs
www.sepon.rs



LIGHT ELECTRIC GROUP

Boška Toškovića 26
36000 Kraljevo, Srbija

+381 36 399 999
office@legroup.rs
www.legroup.rs